


ELITE SPRING FITTING INSTRUCTIONS

Your blind will be supplied with the appropriate brackets and screws.

1. Fixings




x 2



x 2




x 2

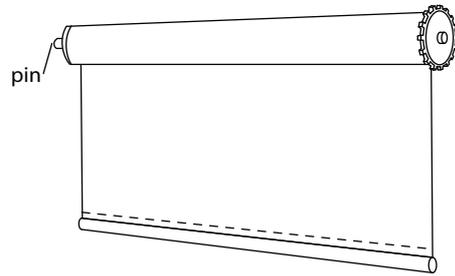


2. Fixing your brackets

Blinds will be supplied according to your order with left or right hand control. The brackets are universal so they can be mounted either side inside recess


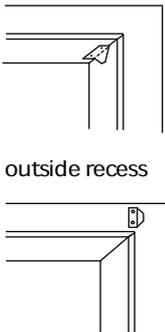


Measure and mark drilling positions

To the ceiling or the top of the window frame i.e. top fix

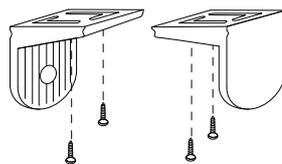



To the wall or the front of the window moulding i.e. face fix

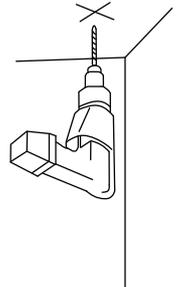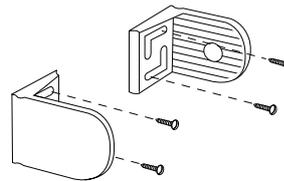

Drill and plug holes and screw brackets into position.

3. Installing your blind

Before fitting the blind into the brackets ensure the retractable pin is fully retracted into the pin end mechanism (see diagram opposite). Then insert the spring end pin into the bracket, once this is inserted rotate the cog (positioned at the opposite end to the the Spring) to release the retractable pin into the bracket, this may take a little rotating to ensure the the cross shaped pin locates into the bracket correctly. The blind should now be secure. Now fit the screw cover caps over the plastic screw housings.

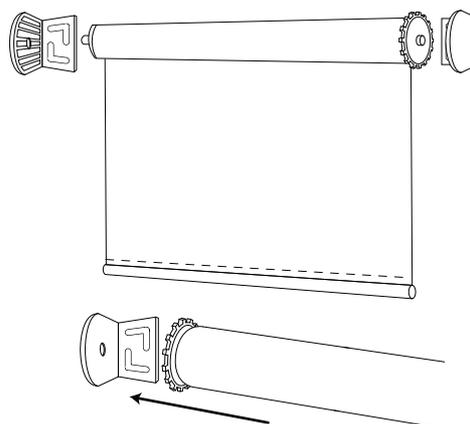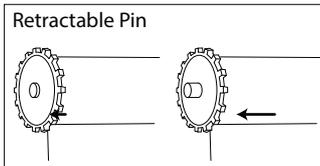

! WARNING

Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product. To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck. Move beds, cots and furniture away from window covering cords. Do not tie cords together. Make sure cords do not twist and create a loop.

